

RC4 SERIES STRIP CHANNEL COVER KIT

4' & 8' Ballast Cover Kit

Description

Envirobrite's® RC4 Strip Channel Cover kits are used to convert 4' and 8' T12 and older T8 lamp channel fixtures measuring 4-1/4" or greater in width resulting in substantial energy savings, improved lighting with excellent returns on investments. Envirobrite® ballast kits are made of lightweight aluminum channels and can be fitted with an Envirobrite® reflector to further enhance your fixtures functionality. Utilizing our Cost-A-Mized program will provide an endless variety of widths to fit any application. These kits, in conjunction with numerous ballast and lamp configurations, can easily produce ideal IES recommended light levels with minimized energy consumption. Envirobrite® kits will continue to provide consistent fixture performance and repeat annual energy savings for up to 25 years.

Application

Envirobrite's® ability to customize the widths of our channel covers will enable a perfect fit for any application. Like our other kits, Envirobrite® channel covers are recognized worldwide as the industry leading retrofit kit for the majority of all industrial and commercial fixtures. Its ideal optics, flexible fit configuration and multi-lamp options will give flexibility to any retro-fit project.

Design

Envirobrite® Strip Channel Covers are 100% high quality white painted aluminum manufactured in our facility using today's latest machinery. Each four or eight foot kit comes complete with UL approved components. Envirobrite® channel cover kits are designed by our expert in house lighting engineers for ideal photometry and trouble-free installation. Every kit is designed to meet UL 1570 specifications for safety. Each strip kit can be made to order to ensure an ideal fit. As with all Envirobrite® products Cost-A-Mized solutions are available to meet every customer's needs.


Primary Features & Benefits

- Proudly Made and Assembled in the USA
- Utility rebate friendly throughout the U.S.
- Significant reduction in maintenance costs
- 1, 2, or 3 linear rows of lamps available
- Aluminum components generate a rust-free approach to less maintenance and lasting appeal
- Considerable reduction in energy costs
- UL classified ballast covers
- Superior lighting directly to the work plane
- 48" lamp holder spacing set at factory – no bracket re-centering required

Quick, Safe and Labor Efficient Installation

- Two 4' kits can be used to retrofit 8' sections
- One Piece construction with no brackets
- Snap-in lamp holders won't fall out during overhead installation
- Streamlined packaging for easy job site material management
- With 1/3 the weight of steel aluminum components permit reduced shipping cost and simpler installation

For added efficiency include high quality T5 or T8 lamps with either instant or programmed start ballasts. Adding an Envirobrite® approved motion sensor system to your retrofit project will further enhance energy savings and create an even faster payback.

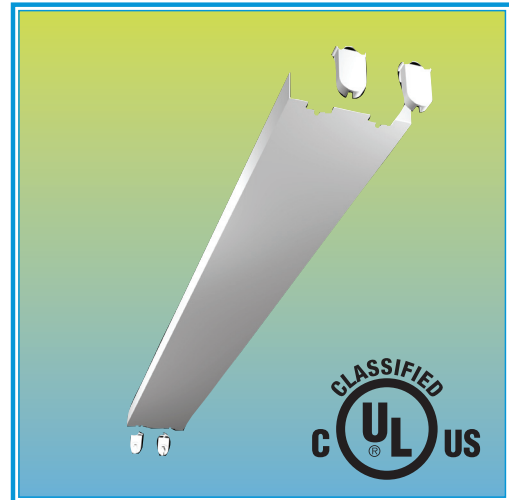


Standard RC4 4' 4000 Series Kit includes

- (1) 4000 series aluminum one piece ballast cover bent to channel width
- (2, 4 or 6) specified shunted or unshunted high quality chemical resistant thermoplastic body UL approved lamp holders
- (2) quarter turns when ordered with a reflector
- (5) tek screws


Standard RC4 8' 4000 Series Kit includes

- (2) 4000 series aluminum one piece ballast cover bent to channel width
- (4, 8 or 12) specified shunted or unshunted high quality chemical resistant thermoplastic body UL approved lamp holders
- (4) quarter turns when ordered with a reflector
- (10) tek screws

Ballast Cover Side View

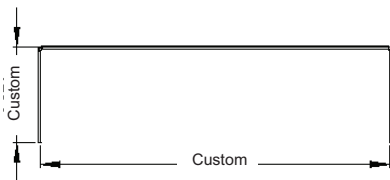


Ballast Cover Top View



Ordering Information

Sample number: RC41402T832WAC050LST

Product Link

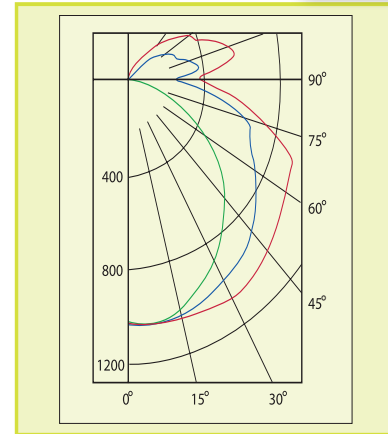

0° — Candala Plot
45° — 4 Lamp T8
90° —

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Luminaire
0 - 30	852	14.4	15.6
0 - 40	1450	24.6	26.6
0 - 60	2838	48.1	52.1
0 - 90	4407	74.7	80.9
0 - 180	5447	92.4	100

RC41402T832WAC055LST used for test
Total Luminaire Optical Efficiency = **92.4%**

Luminaire Spacing Criterion

0 deg - 1.3 | 90 deg - 1.6

Call factory for full photometric report

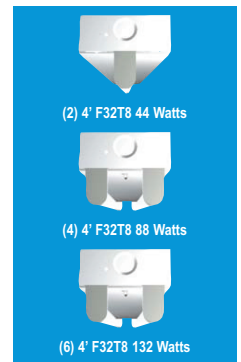

TYPE	DIMENSION	LAMPS	LAMP TYPE	REFLECTOR
○ RC4=Strip Ballast Cover Kit (4000 series)	○ 14=1x4	○ 01=1 Lamp	○ T832=32W	○ EN=95% Miro 4 Enhanced
		○ 02=2 Lamp	○ T554=54W	○ WN=91% White
	○ 03=3 Lamp		○ WA=White Painted Aluminum	
	○ 04=4 Lamp			

*REQUIRED FOR STRIP FIXTURE PRODUCTS				LAMPHOLDER TYPE	INSERTION METHOD
○ C052=5.1875	○ C071=7.125	○ C090=9.0	○ C0120=12.0	○ LS= Shunted	○ T=T8 Tall Twist Lock (Standard)
○ C055=5.5	○ C075=7.5	○ C0103=10.25		○ LU= Unshunted	○ N=T8 Short Snap In Twist Lock
○ C060=6.0	○ C088=8.875	○ C0109=10.875			○ P=T5 Plunger Socket