

UNIVERSAL PREWIRED STRIP RETROFIT KIT

Description and Application

1x8 2-lamp or 4-lamp Strip Fixture Bracket –This universal bracket is designed to be bent at either 4.25" or 5.00" so they're ideal for applications with multiple channel widths. In addition, the bracket is designed as a single bracket with perforated sections to break apart in three sections. This pre-wired feature saves on installation time as the brackets are assembled in the factory with jumpers, lampholders, and ballast disconnects already set. Brackets are made of .032 pre-painted aluminum. All universal bracket kits are packed in quantities of 10.

Design

Envirobrite® brackets are designed by our expert in-house engineers for simple, safe, trouble-free installation. Every Envirobrite bracket is designed to meet UL 1598B.


Features and Benefits

- Adjustable width – 4.25" or 5.00"
- Meets UL 1598B
- Two or four lamp
- Quarter turn slots for easy fixture maintenance
- VariableTek screw slot locations for multiple mounting options.
- Snap-in lampholders won't fall out during overhead installation

Standard Prewired Kit includes:

- (1) Single bracket designed with perforated bends for channel widths of 4.25" or 5.00"
- (1) Hardware pack includes 8 Tek screws, 4 quarter turns, 1 ballast disconnect
- (8) Tall shunted chemical resistant thermoplastic body UL approved lampholders with jumpers attached
- (1) Wall-Nut quick connect with yellow wire

* Optional 4' aluminum 4.00" or 5.00" ballast cover or white/enhanced Miro4 reflectors.

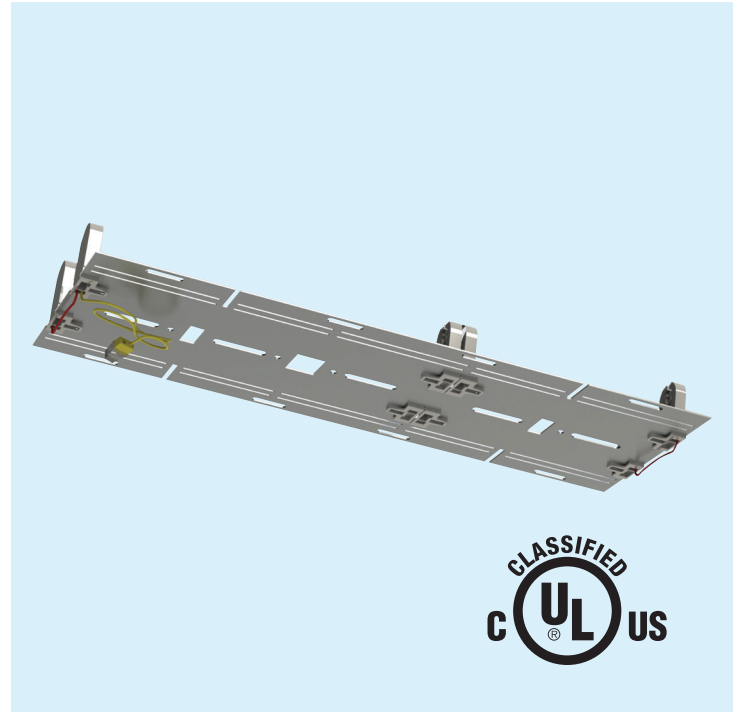

Ordering Information

Sample number: RBS1804T832MULST

Indicates most widely used kit

RBS	18	04	T832	MU	LST
TYPE	BRACKET SERIES	NUMBER OF LAMPS	LAMP TYPE	MATERIALS	SOCKET
<input checked="" type="radio"/> RBS = Retrofit Bracket Set	<input checked="" type="radio"/> 18 = 1x8 kit	<input type="radio"/> 02=2 Lamp <input checked="" type="radio"/> 04=4 Lamp	<input checked="" type="radio"/> T832 = T8	<input type="radio"/> MU = Prewired bracket only <input type="radio"/> WA = Bracket/Ballast cover <input type="radio"/> WN = 92% White Reflector <input type="radio"/> EN = 95% Enhanced Miro4	<input checked="" type="radio"/> LST = Shunted Tall

LIMITED PRODUCT WARRANTY

Energy Planning Associates warrants for a period of 5 years from the date of purchase that all Envirobrite® fixtures will be free of defects from manufacturing and workmanship. This warranty excludes damage of any kind resulting from improper installation, misuse, abuse, accidents, or natural disasters. Energy Planning will repair, or at its option, replace the defective product and only when the product is properly handled, installed, and maintained.

* Kits available for 8' fixtures 1 lamp up to 6 lamp

